



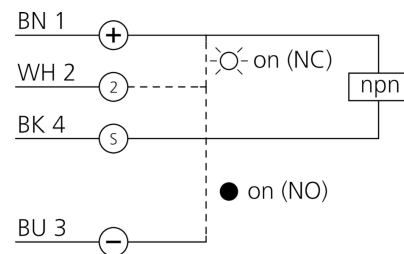

207939
OT 18 FK 400 N3
Retroreflective diffuse sensor

- Universal mounting options
- Low installation depth
- Sensitivity is adjustable
- LED switching status display
- Plastic housing

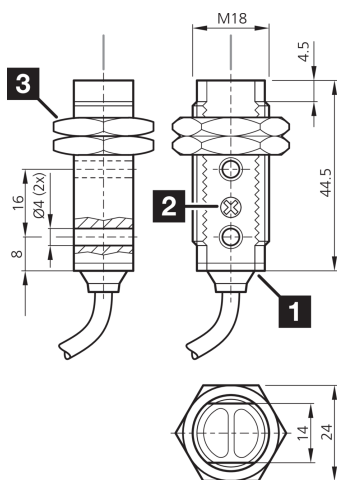

1) Potentiometer
 2) LED

3) Width over flats 24 mm

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
No-load current (max.)	30 mA

Mechanical features

Thread	M18 x 1
Housing length	44.5 mm
Housing material	Plastic (ABS)
Material of cable	PVC
Material	PMMA (Window)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Thread

Output, input, interface

Switching output	npn, 100 mA, NO/NC
------------------	--------------------



207939
OT 18 FK 400 N3
Retroreflective diffuse sensor

Technical data (typ.)		+20°C, 24 V DC
Optical data		
Light source	LED	
Color	Infrared	
Wavelength	880 nm	
Modulation	Clocked	
Ambient light immunity	3 kLx Clocked light, 10 kLx Sunlight	
Detection range, measuring range, tolerance limits		
Range	400 mm	
Standardized measuring plate	200 x 200 mm	
Display, operation		
Sensitivity adjustment	Potentiometer	
Time behavior		
Switching frequency	1000 Hz	
Response time	0.50 ms	
Release time	0.50 ms	
Ambient conditions		
Ambient temperature during operation	-25 ... +55 °C	
Protection type	IP 67	
Electrical connection		
Connection	Cable, 2.0 m	
More information / accessories		https://www.di-soric.com/207939