


## MB101DY


|                                       |                                       |                       |
|---------------------------------------|---------------------------------------|-----------------------|
| Product                               | Control Unit                          |                       |
| Model                                 | Spring                                |                       |
| Type                                  | Flush                                 |                       |
| Contact                               | 2NO                                   |                       |
| Color                                 | Green                                 |                       |
| Dia                                   | 22 mm                                 |                       |
| Current                               | Ie                                    | 3 A (240V AC)         |
| Usage Category                        | AC 15                                 |                       |
| Mechanical Life                       | Min Qty                               | 300000                |
| Electrical Life                       | Min Qty                               | 100000                |
| Operating Frequency                   | On-Off/Hour                           | Mech. 3000 Elec. 1200 |
| Insulation Voltage                    | Ui                                    | 250V                  |
| Impulse Withstand Voltage             | Uimp                                  | 2.5 kV                |
| Dielectric Strength (Body-Contact)    | 2.500V AC                             |                       |
| Dielectric Strength (Contact-Contact) | 1.500V AC                             |                       |
| Isolation Resistance                  | 10 MΩ Min. (500 V DC)                 |                       |
| Operating Temperature                 | -15 / + 80 °C                         |                       |
| Pollution Degree                      | 3                                     |                       |
| Protection Degree                     | IP50                                  |                       |
| Contact Material                      | AgNi                                  |                       |
| Cable Section                         | 1.5-2.5 mm <sup>2</sup>               |                       |
| Screw Torque                          | 1,5 Nm                                |                       |
| Short Circuit Breaking Capacity       | Ics                                   | 1 kA                  |
| Production Time                       | 31.12.1899 00:00:00                   |                       |
| Serial                                | MB Series Plastic                     |                       |
| Specifications                        | Non-flammable V0 PA6.6 contact blocks |                       |
|                                       | Monoblock strong body                 |                       |
|                                       | Finger safe protection                |                       |

|                          |               |                 |
|--------------------------|---------------|-----------------|
| Standards / Certificates | IEC 60947-5-1 | TS EN 60947-5-1 |
|--------------------------|---------------|-----------------|



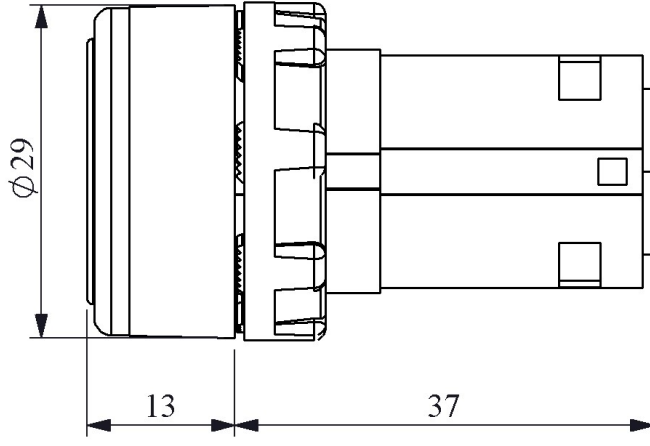

Montaj Ölçüsü  $\phi 22.4 \pm 0.2$  mm

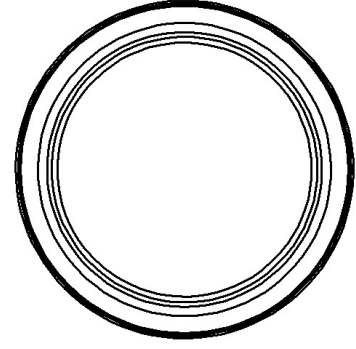

Devre Şeması

