






# **MBSP012Y**

|                              |                                       |                         |
|------------------------------|---------------------------------------|-------------------------|
| <b>Bulb Type</b>             |                                       | Led                     |
| <b>Operating Current</b>     |                                       | 18 mA                   |
| <b>Operational Frequency</b> |                                       | 50 Hz                   |
| <b>Operational Voltage</b>   |                                       | 12V AC/DC               |
| <b>Product</b>               |                                       | Pilot                   |
| <b>Color</b>                 |                                       | Green                   |
| <b>Illumination</b>          |                                       | with LED                |
| <b>Dia</b>                   |                                       | 22 mm                   |
| <b>Power Consumption</b>     |                                       | 0.3 W                   |
| <b>Insulation Voltage</b>    | <b>Ui</b>                             | 250 V                   |
| <b>Operating Temperature</b> |                                       | -15 / + 70 °C           |
| <b>Protection Degree</b>     |                                       | IP50                    |
| <b>Cable Section</b>         |                                       | 1.5-2.5 mm <sup>2</sup> |
| <b>Screw Torque</b>          |                                       | 1,5 Nm                  |
| <b>Production Time</b>       |                                       | 31.12.1899 00:00:00     |
| <b>Serial</b>                |                                       | MB Series Plastic       |
| <b>Electrical Life</b>       | <b>Min Hour</b>                       | 10000                   |
| <b>Specifications</b>        | Non-flammable V0 PA6.6 contact blocks |                         |
|                              | Monoblock strong body                 |                         |
|                              | Finger safe protection                |                         |



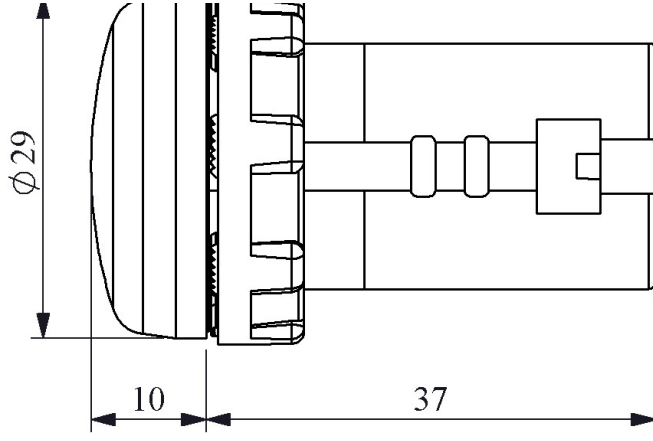

Montaj Ölçüsü  $\phi 22.4 \pm 0.2$  mm

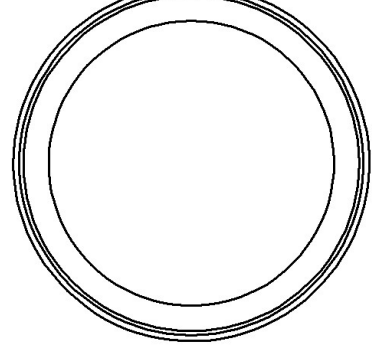

Devre Şeması

